

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

November 22, 2013

WELL WORK PERMIT

Horizontal 6A Well

This permit, API Well Number: 47-5101677, issued to NOBLE ENERGY, INC., is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: SHL 23 HHS

Farm Name: HALL, ROBERT W. JR., ET AL

API Well Number: 47-5101677

Permit Type: Horizontal 6A Well

Date Issued: 11/22/2013

Promoting a healthy environment.

API Number: 51-01677

PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. <u>Failure to adhere to the specified permit</u> conditions may result in enforcement action.

CONDITIONS

- 1. This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACOE). Through this permit, you are hereby being advised to consult with USACOE regarding this proposed activity.
- 2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the moisture content of the fill material shall be within limits as determined by the Standard Proctor Density test of the actual soils used in specific engineered fill, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort, to achieve 95 % compaction of the optimum density. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 4. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 6. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 7. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- 8. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

WW - 6B (3/13)

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

1) Well Operator:	Noble	Energy,	Inc	494501907	Marshall	Sandhill	Majorsville
· ,				Operator ID	County	District	Quadrangle
2) Operator's Well 1	Number:	SHL 23 H	ıs	W	ell Pad Nam	e: SHL 23	
3 Elevation, current	ground:	1376'	Ele	vation, proposed p	ost-construct	ion:	1374.75'
4) Well Type: (a) C	as		Oil	Underground	Storage		_
	Other						
(b) Ii	Gas: S	Shallow		Deep			
	I	Horizontal					
5) Existing Pad? Ye	s or No:	NO					
6) Proposed Target Target-Marcellus, Dept				ed Thicknesses and	l Associated	Pressure(s):	
7) Proposed Total V	ertical De	pth: _7	054'				
8) Formation at Tota	al Vertical	Depth:	Onondaga the	n plug back to base of I	Marcellus with so	lid cement plug	
9) Proposed Total M	1easured [Depth:	13,957'				
10) Approximate Fr	esh Water	Strata Dep	ths: <u>26</u>	4'			
11) Method to Deter	rmine Fres	sh Water De	epth: Of	fset well data			
12) Approximate Sa	ltwater De	epths:	None noted for	offsets			
13) Approximate Co	oal Seam I	Depths:	862', 866' Pit	tsburgh			
14) Approximate De	epth to Po	ssible Void	(coal mine, I	carst, other):	None antic	ipated, drilling in	pillar-see mine maps
15) Does proposed vadjacent to an ac				irectly overlying on depth of mine:	r Yes, Shoe	maker Mine with	base at appx. 866
16) Describe propos	sed well w	ork:	ill the vertical depth n	ot more than 99' into the Ononc	laga at an estimated to	otal vertical depth of a	pproximately 7,054 feet.
Log well then plug back	with solid cem	ent plug from TC	to KOP at 6904'.	Proceed with drilling Horizon	ontal leg - stimulate	and produce the	Marcellus Formation.
If we should encounter a	n unanticipated	void we will ins	all casing at a min	imum of 50° but not more t	han 100' below the	void, set a basket	and grout to surface.
17) Describe fractur	_	_		l. Stage spacing is depender	nt upon engineering	design. Slickwater	fracturing technique will
be utilized on each sta	ge using sand	d, water, and ch	nemicals. See att	ached list.			
	····						
18) Total area to be	disturbed,	, including	roads, stockp	ile area, pits, etc, (acres):	15.78 acres	<u>s</u>
19) Area to be distu	rbed-fer-y	ell pad onl	y, less access	road (acres):	9.16 acres	i	
		and Ga					Page 1 of 3

NOV 2 0 2013

WW - 6B (3/13)

20)

CASING AND TUBING PROGRAM

ТҮРЕ	Size	New or Used	Grade	Weight per ft.	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill -up (Cu. Ft.)
Conductor	30"	Ν	LS	117#	40'	40'	CTS
Fresh Water	20"	Ν	LS	94#	400'	400'	CTS
Coal	13 3/8"	Ν	J-55	54.5#	1326'	1326'	CTS
Intermediate	9 5/8"	Ν	J-55	36#	3381'	3381'	CTS
Production	5 1/2"	N	P110	20#	13,957'	13,957'	TOC 200' above 9.625 shoe
Tubing							
Liners							

7-23-13

TYPE	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield
Conductor	30"	36"	0.375		Type 1/Class A	1.2
Fresh Water	20"	26"	.438	2110	Type 1/Class A	1.2
Coal	13 3/8"	17 1/2"	.380	2730	Type 1/Class A	1.2
Intermediate	9 5/8"	12 3/8"	.352	3520	Type 1/Class A	1.19
Production	5 1/2"	8 3/4" & 8 1/2"	.361	12,640	Type 1/Class A	1.27
Tubing						
Liners						

PACKERS

Kind:		
Sizes:		
Depths Set:		

Received
AUG 2 2013
Page 2 of 3

WV Dept. of Environmental Protection

WW - 6B (3/13)

21) Describe centralizer placement for each casing string.	No centralize	rs will be used with con-	ductor casing. Surface
	casing will have bow spring centralizers on first 2 joints then every third joint to 100' from surface. Intermediate casing was	will have bow spring centralize	ers on first 2 joints then every third join	nt to 100' from surface. Production
	string will have a rigid bow spring every joint to KOP, rigid	d bow spring e	every third joint fro	m KOP to top of
	cement.			
2,2	Describe all cement additives associated with each cemen	t type.	Conductor-1.15	% CaCl2.
√	Surface and Coal-15.6 ppg Type 1 +2% CaCl, 2% Accelerator, 0	0.2% Antifoam a	nd 0.125#/sk Flake.	Excess Yield 1.18
Sch.	Intermediate- 15.6 ppg Class A +0.4% Ret, 0.15% Disp,	0.2% AntiFoan	n, 0.125#/sk Lost	circ 30% Excess
Variance	Yield=1.19 to surface. Production- 14.8 ppg class A 25:75:0 Syst	tem +2.6% Ceme	ent extender, 0.7% F	luid Loss additive,
10/31/13	0.45% high temp retarder, 0.2% friction reducer 15% E	xcess Yield=1	1.27 TOC greater	or equal to 200'
1 -1/13	above 9.625" shoe.			
		-		

23) Proposed borehole conditioning procedures.

Conductor-The hole is drilled w/air and casing is run on air. Apart from insuring the hole is clean via air circulation at TD, there are no other conditioning procedures. Surface-The hole is drilled w/air and casing is run on air. Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement.

Coal-The hole is drilled and cased w/air or on Freshwater based mud. Once casing is at setting depth, the hole is filled w/KCI water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate-Once surface casing is set and cemented, intermediate hole is drilled either on air or or SOBM and filled with KCI water once drilled to TD. Production-The hole is drilled with SOBM and once to TD, circulated at maximum allowable pump rate for at least 6x bottoms up. Once on bottom with casing, circulate a minimum of one hole volume prior to pumping cement.

*Note: Attach additional sheets as needed.

₹ECEIVED

Othog of Oil and Gas

NOV 2 0 2013

WV Department of Environmental Protection

NOV 19 2013



DRILLING WELL PLAN

SHL-23H Pilot Hole-HS (Marcellus HZ)

Macellus Shale Horizontal Marshall County, WV

		,,	
	SHL-23H Pilot Hole SHL (Lat/Long)	(546767.01N, 1713038.31E) (NAD27)	•
76'	SHL-23H Pilot Hole LP (Lat/Long)	(547136.99N, 1712545.33E) (NAD27)	

		SHL-23H Pilot Hole SHL (Lat/Long)			SHL (Lat/Long)	(546767.01N, 1713038.31E) (NAD27)									
Grour	d Elevation		1376	'	SHI	23H P	lot Hole	LP (Lat/Long) (547136.99N, 1712545.33E)		E) (NAD27)					
	Azm		325°		SHL	-23H Pil	ot Hole	BHL (Lat/Long)	(552596.42N, 1708722.6E) (NAD27)		E) (NAD27)				
WELLE	BORE DIAGRAM	HOLE	CASING	GEOLOGY	MD	TVD	MUD	CEMENT	CENTRALIZERS	CONDITIONING	COMMENTS				
		36	30" 117#	Conductor	40	40	AIR	To Surface	N/A	Ensure the hole is clean at TD.	Stabilize surface fill/soil. Conductor casing = 0.375" wall thickness				
×	×	26	20" 94#	Surface Casing	400	400	AIR	15.6 ppg Type 1 + 2% CaCl, 0.25# Lost Circ 30% Excess Yield = 1.18	Centralized every 3 joints to surface	Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate a minimum of one hole volume prior to pumping cement.	Surface casing = 0.438" wall thickness Burst=2730 psi				
			13-3/8" 54.5#					15.6 ppg Type 1 + 2% CaCl, 0.25# Lost Circ	Bow Spring on first 2 joints then every third	Fill with KCI water once drilled to TD. Once casing is at setting depth, circulate	Intermediate casing = 0.380"				
x	l l lx	17 1/2	J-55 BTC	Pittsburgh Coal	862	862	AIR	30% Excess	joint to 100' form	a minimum of one hole	wall thickness				
				Int. Casing	1326	1326		Yield = 1.18	surface	volume prior to pumping cement.	Burst=2730 psi				
l v				Big Lime	2020	2020		15.6ppg Class A							
				Big Injun	2113	2113		+0.4% Ret, 0.15% Disp,	Bow spring centralizers every third joint to 100 feet from surface.	Fill with KCI water once	Casing to be ran 250' below				
		12 3/8	9-5/8" 36#	5th Sand Base	3131	3131	AIR	0.2% AntiFoam, 0.125#/sk Lost Circ		1.25#/sk Lost Circ every third joint to 100' s at setting depth, circulate the 5t a minimum of one hole casing =			bow spring centralizers is at cetting		the 5th Sand, Intermediate
			J-55 LTC	Car Dana Dasa	0101	3131	7.113				casing = 0.352" wall thickness Burst=3520 psi				
				Int. Casing	3381	3381		Yield=1.19 To Surface		cement.					
		-		Warren Sand	3301	4602		10 Surface							
	lâ	1	8.75" Vertical		-	5255	8.0ppg - 9.0ppg SOBM		Rigid Bow Spring every						
		8.75" Vertical		Java	-			1 2 4	third joint from KOP to						
				Angola		5487		14.8ppg Class A 25:75:0							
				Rhinestreet		6117		System +2.6% Cement							
								extender, 0.7% Fluid	Once at TD, circulate a max allowable pump ra	Once at TD circulate at					
	1		5-1/2"	Cashaqua		6551		Loss additive, 0.45% high temp retarder, 0.2%		max allowable pump rate	Production casing = 0.361" wall thickness				
l X	IX.		20#	Middlesex		6646	12.0ppg-	friction reducer		for at least 6x bottoms up. Once on bottom with	Burst=12640 psi				
		8.75" Curve	HCP-110 TXP BTC	West River		6682	12.5ppg SOBM	10% Excess		casing, circulate a minimum	Note:Actual centralizer				
			INFBIC	Burkett		6737	SOBM	Yield=1.27	Rigid Bow Spring every	of one hole volume prior to	schedules may be changed due to hole conditions				
				Tully Limestone		6761			joint to KOP	pumping cement.					
				Hamilton		6792		TOC >= 200' above 9.625" shoe							
				Marcellus		6904	12.0ppg-								
		8.75" - 8.5" Lateral		TD	13957	6944	12.5ppg								
l x	×	(1)					SOBM								
	Hame	X	X	X	X		Χ:::::::::	X	X		X				
	LP @ 6	944' TVD / 7292' MD				emented Lo CP-110 TXP			+/-666	5' ft Lateral	TD @ +/-6944' TVD +/-13957' MD				
	X	X	X	X	X		X	×	X	X	X=centralizers				
				Onondaga	6954 Top	6966 Base		17.5ppg							
		8.75" Pilot	Isolation /	Huntersville	6966 Top	7251 Base	12.0ppg-	Class H (SLB) from TD to 200' above KOP		Once at TD, circulate at OH logs, loggers on	OH logs, loggers on location				
		8.75 Pilot	Sidetrack Cement plugs	Pilot Hole TD in the Huntersville 99' past the Onondaga Ceiling	7053	7053	12.5ppg SOBM	(2) 800° balanced plugs w/ 2.375° tubing	N/A	drilling pump rate for at least three hours. TOOH and run OH logs.	to call TD. Dir. Surveys shoe to TD				

RECEIVED Office of Oil and Gas

	-1	Page _		of	
API Number 47	21	0	1677	7	
Operator's V	Well N	o. SHL	23 HHS		

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS

FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

Operator Name_ Noble Energy, Inc	OP Code _494501907
Watershed (HUC 10) Robinson Fork-Enlow Fork Quadrangle	Majorsville
Elevation 1376' County Marshall	District_ Sandhill
Do you anticipate using more than 5,000 bbls of water to complete the proposed will a pit be used for drill cuttings? Yes No If so, please describe anticipated pit waste: Closed Loop-no pit will be complete the proposed will be used for drill cuttings?	be utilized
Will a synthetic liner be used in the pit? Yes No No If	so, what ml.?
Proposed Disposal Method For Treated Pit Wastes: Land Application Underground Injection (UIC Permit Number Reuse (at API Number TBD-Next anticipated well Off Site Disposal (Supply form WW-9 for disposal loc Other (Explain	cation)
Will closed loop system be used? Yes	
Drilling medium anticipated for this well? Air, freshwater, oil based, etc. Air thru	intermediate string then SOBM
-If oil based, what type? Synthetic, petroleum, etc. Synthetic	
Additives to be used in drilling medium? Please see attached list	
Drill cuttings disposal method? Leave in pit, landfill, removed offsite, etc	
-If left in pit and plan to solidify what medium will be used? (cement, li	me, sawdust)
-Landfill or offsite name/permit number? Please see attached list	·
I certify that I understand and agree to the terms and conditions of the Con August 1, 2005, by the Office of Oil and Gas of the West Virginia Department provisions of the permit are enforceable by law. Violations of any term or conclaw or regulation can lead to enforcement action. I certify under penalty of law that I have personally examined and an application form and all attachments thereto and that, based on my inquiry obtaining the information, I believe that the information is true, accurate, and penalties for submitting false information, including the possibility of fine or important to the concentration of the Concentrat	of Environmental Protection. I understand that the dition of the general permit and/or other applicable m familiar with the information submitted on this of those individuals immediately responsible for complete. I am aware that there are significant
Company Official Signature WMM	OFFICIAL SEAL Notary Public, State Of West Virginia
Company Official (Typed Name) Jessica Leska Company Official Title Regulatory Technician	LAURA L. ADKINS Hard Rock Exploration, Inc. P.O. Box 13059 Charleston, WV 25360 My Commission Expires November 23, 2015
Subscribed and sworn before me this 23th day of July	
My commission expires 1000 23, 2015	Office of Oil and Gas WV Dept. of Environmental Protection

Field Reviewed?

Noble Energy, Inc	
Proposed Revegetation Treatment: Acres Disturble Lime $\frac{2 \text{ to } 3}{\text{Lime } (10\text{-}20\text{-}20 \text{ or equivalent})} \frac{50}{\text{Mulch}}$	O correct to pH
	Seed Mixtures
Seed Type Tall Fescue Area I Ibs/acre 40	Seed Type Area II Seed Type 40
Ladino Clover 5	Ladino Clover 5
Photocopied section of involved 7.5' topographic Plan Approved by: Bill Hendershot	c sheet.
Comments:	
Title: Oil and Gas Inspector	Date: 7-23-15

Received

Site Water/Cuttings Disposal

Cuttings

Haul off Company:

Eap Industries, Inc. DOT # 0876278 1575 Smith Twp State Rd. Atlasburg PA 15004 1-888-294-5227

Disposal Locations:

Apex Environmental, LLC Permit # 06-08438 11 County Road 78 Amsterdam, OH 43903 740-543-4389

Westmoreland Waste, LLC Permit # 100277 111 Conner Lane Belle Vernon, PA 15012 724-929-7694

Sycamore Landfill (Allied Waste) R30-07900105-2010 4301 Sycamore Ridge Road Hurricane, WV 25526 304-562-2611

Water

Haul off Company:

Dynamic Structures, Clear Creek DOT # 720485 3790 State Route 7 New Waterford, OH 44445 330-892-0164

Disposal Location:

Solidification
Waste Management, Arden Landfill Permit # 100172
200 Rangos Lane
Washington, PA 15301
724-225-1589

Solidification/Incineration Soil Remediation, Inc. Permit # 02-20753 6065 Arrel-Smith Road Lowelville, OH 44436



west virginia department of environmental protection



Water Management Plan: Primary Water Sources



WMP-01448

API/ID Number:

047-051-01677

Operator:

Noble Energy, Inc

SHL23HHS

Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- •Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- •Identification of sensitive aquatic life (endangered species, mussels, etc.);
- •Quantification of known existing demands on the water supply (Large Quantity Users);
- •Minimum flows required by the Army Corps of Engineers; and
- · Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.

APPROVED SEP 2 0 2013

Source Summary

API Number: 047-051-01677 Operator: Noble Energy, Inc WMP-01448 SHL23HHS Stream/River Wheeling Creek Pump Station 1 @ CNX Land Resources Marshall **Consol Energy** Owner: Source Intake Latitude: Intake Longitude: End Date Total Volume (gal) Max. daily purchase (gal) Start Date 8/21/2013 8/21/2014 10,164,000 39.95205 -80.56189 Regulated Stream? Ref. Gauge ID: 3111955 Wheeling Creek near Majorsville, WV Min. Passby (cfs) Max. Pump rate (gpm): Min. Gauge Reading (cfs): 18.23 16.63 1,000 **DEP Comments:** Wheeling Creek Pump Station 2 @ CNX Land Resources Marshall Owner: CNX Land Resources, Inc. Source Max. daily purchase (gal) Start Date End Date Total Volume (gal) Intake Latitude: Intake Longitude: 8/21/2013 8/21/2014 10,164,000 39.949578 -80.531256 Regulated Stream? Ref. Gauge ID: 3111955 Wheeling Creek near Majorsville, WV Max. Pump rate (gpm): Min. Gauge Reading (cfs): Min. Passby (cfs) 16.24 1,000 18.23 **DEP Comments:**

Source Summary WMP-01448 API Number: 047-051-01677 Operator: Noble Energy, Inc SHL23HHS **Purchased Water** West Virginia American Water - Weston Water Treatme Lewis West Virginia American · Source Owner: Water Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 8/21/2013 8/21/2014 10,164,000 500,000 Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID: 3061000 WEST FORK RIVER AT ENTERPRISE, WV Max. Pump rate (gpm): Min. Gauge Reading (cfs): 170.57 Min. Passby (cfs) DEP Comments: **Bethlehem Water Department** Source Ohio Owner: Bethlehem Water Department Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 8/21/2013 8/21/2014 10,164,000 200,000 ✓ Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam Max. Pump rate (gpm): Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs) **DEP Comments:** Bethlehem Water Department purchases all its water from the City of Wheeling. Thresholds are set based on the location of the City of Wheeling's raw water intake. Source Wellsburg Water Department Brooke Owner: Wellsburg Water Department Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 8/21/2013 8/21/2014 10,164,000 200,000

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

✓ Regulated Stream?

Min. Gauge Reading (cfs):

Ohio River Min. Flow Ref. Gauge ID:

6.468.00

9999999

Min. Passby (cfs)

DEP Comments:

This alluvial groundwater well is, to some extent, under the influence of the Ohio River. Please adhere to stated minimum flow requirements on the Ohio River for withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Source Moundsville Water Board Marshall Owner: Moundsville Water Treatment Plant

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

8/21/2013 8/21/2014 10,164,000 2,000,000 - -

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)

DEP Comments: This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Source Dean's Water Service Ohio Owner: Dean's Water Service

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

8/21/2013 8/21/2014 10,164,000 600,000 - -

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)

DEP Comments:

• Source Wheeling Water Department Ohio Owner: Wheeling Water Department Department

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

8/21/2013 8/21/2014 10,164,000 17,500 - -

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)

DEP Comments: Refer to the specified sation on the National Weather Service's Ohio River forecasts at

the following website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Source Ohio County PSD Ohio Owner: Ohio county PSD

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

720,000

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)

10,164,000

DEP Comments: Refer to the specified station on the National Weather Service's Ohio River forecast

website: http://www.erh.noaa.gov/ohrfc//flows.shtml

8/21/2013

8/21/2014

Source Summary

WMP-01448

API Number:

047-051-01677

Operator:

Noble Energy, Inc

SHL23HHS

Ground Water

Shoemaker Groundwater Well #3 Source

Marshall

Owner:

Consol Energy

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

8/21/2013

8/21/2014

10,164,000

40.0222

-80.73389

✓ Regulated Stream?

Ohio River Min. Flow

Ref. Gauge ID:

999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

800

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

DEP Comments:

This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Source

Shoemaker Groundwater Well #4

Marshall

Owner:

Consol Energy

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

40.022293

Intake Latitude: Intake Longitude: -80.733586

8/21/2013

8/21/2014

10,164,000

Ohio River Min. Flow Ref. Gauge ID:

999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

Regulated Stream?

800

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

DEP Comments:

This alluvial groundwater well is, to some extent, under the influence of the Ohio River. Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Source

Shoemaker Groundwater Well #5

Marshall

Owner:

Consol Energy

Start Date

End Date

Total Volume (gal)

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

8/21/2013

8/21/2014

10,164,000

40.021256

-80.734568

✓ Regulated Stream?

Ohio River Min. Flow

Ref. Gauge ID:

999999

Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm):

800

Min. Gauge Reading (cfs):

6,468.00

Min. Passby (cfs)

DEP Comments:

This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

8/21/2013 8/21/2014 10,164,000 40.02076 -80.73397

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): 800 Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)

DEP Comments: This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

			Source Deta	all		
	WMP-0)1448	API/ID Number: 047 SHL23HH:	7-051-01677 S	Operator: Noble En	ergy, Inc
☐ Tro	HUC-8 Code: Drainage Area dangered Species out Stream? gulated Stream? oximate PSD?	Consc 5030106 (sq. mi.): 2500	ream?	An All Ai	Source Latitude: 40.0 Source Longitude: -80. ticipated withdrawal start date: nticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm): Max. Simultaneous	73389 8/21/2013 8/21/2014 10,164,000 800 s Trucks:
✓ Ga	uged Stream?		11		Max. Truck pump rat	e (gpm)
	Reference Gaug Drainage Area (so	9999999 1. mi.) 25,00	Ohio River Station: Willow	Island Lock &	Dam Gauge Threshold (cfs):	6468
Month 1 2 3 4 5 6 7 8 9 10 11 12	Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00 24,300.00 16,000.00 13,400.00 12,800.00 15,500.00 26,300.00 41,300.00	Threshold (+ pump	Estimated Available water (cfs)			
	W	/ater Availa	bility Profile		Water Availability Assessm Base Threshold (cfs):	ent of Location
8000 6000 4000	Flow on the fingineers maintain t	. Please adher	gulated by the Army Co e to the stated thresho yaranteed flow require	lds to	Upstream Demand (cfs): Downstream Demand (cfs): Pump rate (cfs): Headwater Safety (cfs):	0.00 0.00 1.78 0.00
2000	0		***		Ungauged Stream Safety (c	fs): 0.00

10 11

12

1

2

3

6


7

Median Monthly Flow — Threshold


Min. Gauge Reading (cfs):

Passby at Location (cfs):

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

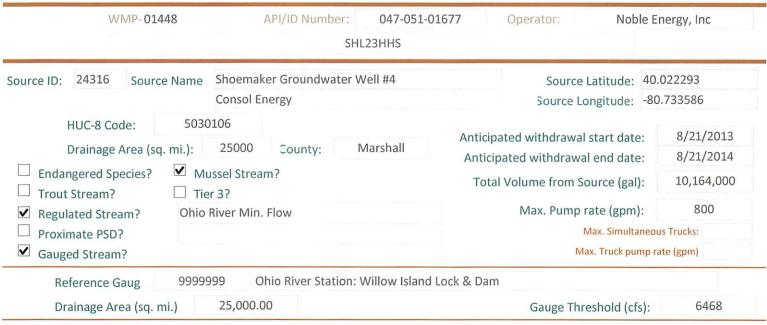

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	45,700.00		-
2	49,200.00		-
3	65,700.00	-	-
4	56,100.00	-	-
5	38,700.00	-	-
6	24,300.00		
7	16,000.00		2:
8	13,400.00	-	-
9	12,800.00	-	-
10	15,500.00		
11	26,300.00	-	-
12	41,300.00	-	-

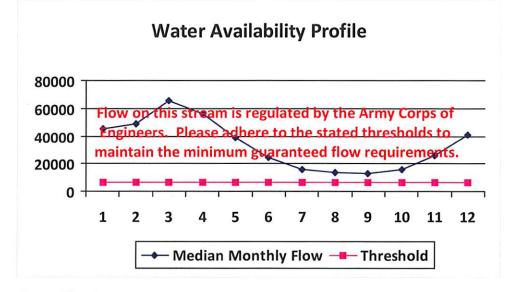

Location
-
0.00
0.00
1.78
0.00
0.00

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

			Source	ce Detail		
	WMP-(01448	API/ID Number:	047-051-0 HL23HHS	O1677 Operator: Noble E	nergy, Inc
Source I	D: 24317 Sou		emaker Groundwater nsol Energy	Well #5	Source Latitude: 40.	
☐ Tro	HUC-8 Code: Drainage Area dangered Species out Stream? gulated Stream? oximate PSD? uged Stream?	?	000 County: Stream? • Min. Flow	Marshall	Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm): Max. Simultaneou Max. Truck pump rate	
	Reference Gaug	9999999	Ohio River Station	: Willow Island	Lock & Dam	
	Drainage Area (so	q. mi.) 25,	,000.00		Gauge Threshold (cfs):	6468
Month 1	Median monthly flow (cfs) 45,700.00	Threshold (+ pump	Estimated Available water (cfs)			
2	49,200.00	-				
3	65,700.00	-				
4	56,100.00	-				
5	38,700.00	-				
6	24,300.00		-			
7	16,000.00	-	-			
8	13,400.00	2	-			
9	12,800.00	-				
10	15,500.00	-				
11	26,300.00 41,300.00	-				
	V	/ater Avail	lability Profile		Water Availability Assessn Base Threshold (cfs):	nent of Location
8000	0 ———				Upstream Demand (cfs):	0.00
6000	0 Flow on th	nis stream is r	egulated by the A	rmy Corps o	f Downstream Demand (cfs)	
4000	Engineers	. Please adhe	ere to the stated th	hresholds to	Pump rate (cfs):	1.78
	maintain t	he minimum	guaranteed flow r	equirement	S. Headwater Safety (cfs):	0.00
2000	0				Ungauged Stream Safety (cfs): 0.00
	1 2	3 4 5	6 7 8 9	10 11	12 Min. Gauge Reading (cfs):	_


◆ Median Monthly Flow ■ Threshold

Passby at Location (cfs):

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

			<u>30urce</u>	e Detail			
	WMP-0	1448	API/ID Number:	047-051-0167	7 Operator:	Noble Er	nergy, Inc
			SHL	_23HHS			
Source II	O: 24318 Sou		maker Groundwater W ol Energy	Vell #6		Latitude: 40.	02076 .73397
	HUC-8 Code: Drainage Area (dangered Species?	Mussel S		Marshall	Anticipated withdrawal Anticipated withdrawa Total Volume from So	I end date:	8/21/2013 8/21/2014 10,164,000
✓ Re	☐ Trout Stream?☐ Regulated Stream?☐ Proximate PSD?☐ Tier 3?Ohio River Min. Flow				Max. Pump rate (gpm): 80 Max. Simultaneous Trucks:		800 s Trucks:
✓ Ga	uged Stream?			,	M	ax. Truck pump ra	te (gpm)
	Reference Gaug Drainage Area (sq	9999999 . mi.) 25,0	Ohio River Station: \	Willow Island Lock		eshold (cfs):	6468
Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)				
1	45,700.00		-				
3	49,200.00 65,700.00	-	- = -				
4	56,100.00	151					

Month	monthly flow (cfs)	(+ pump	<u>Available</u> water (cfs)
1	45,700.00	-	-
2	49,200.00	4	-
3	65,700.00	-	
4	56,100.00	3	-
5	38,700.00		-
6	24,300.00		-
7	16,000.00	-	-
8	13,400.00	-	É
9	12,800.00	-	
10	15,500.00	-	-
11	26,300.00	-	-
12	41,300.00	2	2

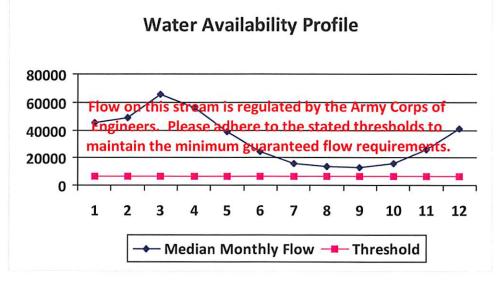


Location
-
0.00
0.00
1.78
0.00
0.00
-
-

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01448	API/ID Number:	047-051-01677	Operator: Noble E	nergy, Inc	
	SHL	.23HHS			
Source ID: 24319 Source Nam	e West Virginia American Wa	ter - Weston Water T	reat Source Latitude: -		
	West Virginia American Wa	ter	Source Longitude: -		
HUC-8 Code: 5020002		Ant	cicipated withdrawal start date:	8/21/2013	
Drainage Area (sq. mi.): 104.83 County: Lewis			Anticipated withdrawal end date:	8/21/2014	
☐ Endangered Species? ✓ Mussel Stream? ☐ Trout Stream? ☐ Tier 3?			Total Volume from Source (gal):	10,164,000	
✓ Regulated Stream? Sto	newall Jackson Dam		Max. Pump rate (gpm):		
✓ Proximate PSD? We	eston WTP		Max. Simultaneous Trucks:		
✓ Gauged Stream?			Max. Truck pump r	ate (gpm)	
Reference Gaug 300	MEST FORK RIVER	AT ENTERPRISE, WV			
Drainage Area (sq. mi.)	759.00		Gauge Threshold (cfs):	234	
Median Thres	hold <u>Estimated</u>				

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	321.23	18.	-
2	361.67	-	*
3	465.85	-	-
4	266.43		
5	273.47	-	
6	137.03		-
7	88.78	-	-
8	84.77	-	
9	58.98	-	2
10	57.83	-	
11	145.12	-	-
12	247.76	-	-

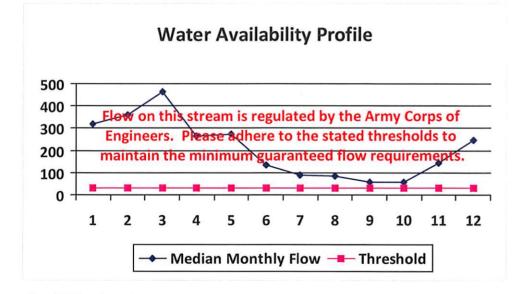

Upstream Demand (cfs):	24.32
Downstream Demand (cfs):	0.00
Pump rate (cfs):	
Headwater Safety (cfs):	8.08
Ungauged Stream Safety (cfs):	0.00

Passby at Location (cfs):

Water Availability Assessment of Location

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

			Source Deta	dii
	WMP- ()1448	API/ID Number: 047 SHL23HH	7-051-01677 Operator: Noble Energy, Inc
Source II	D: 24320 Sou		hlehem Water Department hlehem Water Department	Source Latitude: - Source Longitude: -
☐ Tro	HUC-8 Code: Drainage Area dangered Species out Stream? gulated Stream? oximate PSD? uged Stream?	5030106 (sq. mi.): 25 ? ✓ Mussel ☐ Tier 3?	000 County: Ohio Stream? Min. Flow	Anticipated withdrawal start date: Anticipated withdrawal end date: 8/21/2014 Total Volume from Source (gal): 10,164,000 Max. Pump rate (gpm): Max. Simultaneous Trucks: Max. Truck pump rate (gpm)
	Reference Gaug	9999999	Ohio River Station: Willow	Island Lock & Dam
	Drainage Area (so	q. mi.) 25	,000.00	Gauge Threshold (cfs): 6468
Month 1 2 3 4 5 6 7 8 9 10 11 12	Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00 38,700.00 16,000.00 13,400.00 12,800.00 15,500.00 26,300.00 41,300.00	Threshold (+ pump	Estimated Available water (cfs)	
	V	Vater Avai	lability Profile	Water Availability Assessment of Locati Base Threshold (cfs):
8000	0			Upstream Demand (cfs):
6000	0 Flow op ti	nis stream is r	regulated by the Army Co	Downstream Demand (cfs):
4000			ere to the stated thresho	1
2000	maintain t	he minimum	guaranteed flow require	Headwater Safety (cfs): 0.0
	0			Ungauged Stream Safety (cfs): 0.0
	1 2	3 4 5	6 7 8 9 10	11 12 Min. Gauge Reading (cfs):

→ Median Monthly Flow → Threshold

Passby at Location (cfs):

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

			Source Detail		
	WMP-(01448	API/ID Number: 047-051 SHL23HHS	-01677 Operator: Noble En	ergy, Inc
Source ID): 24321 Sou		sburg Water Department Sburg Water Department	Source Latitude: -	
☐ Tro ✓ Reg ✓ Pro	HUC-8 Code: Drainage Area dangered Species out Stream? gulated Stream? oximate PSD? uged Stream?	? Mussel S Tier 3? Ohio River I	tream?	Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm): Max. Simultaneous Max. Truck pump rate	
	Reference Gaug Drainage Area (so	9999999 q. mi.) 25,0	Ohio River Station: Willow Islar 00.00	nd Lock & Dam Gauge Threshold (cfs):	6468
Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)		
1 2 3 4 5 6 7 8 9	45,700.00 49,200.00 65,700.00 56,100.00 38,700.00 24,300.00 16,000.00 13,400.00 12,800.00				
10 11 12	15,500.00 26,300.00 41,300.00				
	V	Vater Availa	ability Profile	Water Availability Assessment Base Threshold (cfs):	ent of Location
80000 60000 40000 20000	Flow on the fingineers maintain t	. Please adhe	egulated by the Army Corps re to the stated thresholds suaranteed flow requiremen	Pump rate (cfs):	0.00
(1 2	3 4 5	6 7 8 9 10 1		

◆ Median Monthly Flow ■ Threshold

Passby at Location (cfs):

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

	WMP-0	1448	API/ID Number: SHL	047-051-01677 23HHS	Operator: Noble	Energy, Inc
Source II): 24322 Sou		undsville Water Board undsville Water Treatme	ant Plant	Source Latitude:	
☐ Tro	HUC-8 Code: Drainage Area (dangered Species? out Stream?	5030106 sq. mi.): 25	000 County: N Stream?		Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal):	8/21/2013 8/21/2014 10,164,000
☐ Pro	gulated Stream? oximate PSD?	Ohio Rive	r Min. Flow		Max. Pump rate (gpm): Max. Simultane	
✓ Ga	uged Stream?				Max. Truck pump	rate (gpm)
	Reference Gaug Drainage Area (sq	9999999 . mi.) 25	Ohio River Station: V	Villow Island Lock	& Dam Gauge Threshold (cfs):	6468
Month 1 2 3 4 5 6 7 8 9 10 11 12	Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00 38,700.00 24,300.00 16,000.00 12,800.00 12,800.00 26,300.00 41,300.00	Threshold (+ pump	Estimated Available water (cfs)			
	W	/ater Avai	lability Profile		Water Availability Assess Base Threshold (cfs):	ment of Location
80000 60000 40000	Flow on the Engineers maintain t	Please adh	regulated by the Arn ere to the stated thr guaranteed flow re	esholds to	Upstream Demand (cfs):Downstream Demand (cfPump rate (cfs):Headwater Safety (cfs):	0.00
	0	3 4 5	6 7 8 9	10 11 12	Ungauged Stream Safety Min. Gauge Reading (cfs Passby at Location (cfs): -

→ Median Monthly Flow — Threshold

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

	WMP-0	1448	API/ID Number:	047-051-016 L23HHS	77 Operator:	Noble Ener	gy, Inc
Source II	D: 24323 Sou	rec manne	's Water Service 's Water Service			_atitude: - ngitude: -	
☐ Tro	HUC-8 Code: Drainage Area (dangered Species? out Stream? gulated Stream? oximate PSD?		ream?	Ohio	Anticipated withdrawal Anticipated withdrawa Total Volume from So Max. Pump r	start date: I end date: purce (gal): ate (gpm): Max. Simultaneous T	
✓ Ga	uged Stream?	0000000	Ol: B: GI	well the li		x. Truck pump rate	(gpiii)
	Reference Gaug Drainage Area (sq	9999999 . mi.) 25,00	Ohio River Station: 00.00	Willow Island Lo		eshold (cfs):	6468
Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)				
1 2 3 4 5 6 7 8 9 10 11	45,700.00 49,200.00 65,700.00 56,100.00 38,700.00 24,300.00 16,000.00 12,800.00 12,800.00 26,300.00 41,300.00		-				
	W	/ater Availa	bility Profile			bility Assessmer	nt of Location
					Base Thresho		-
8000	0				Upstream De		0.00
6000			gulated by the Ar			Demand (cfs):	0.00
4000	0 •		e to the stated th		Pump rate (c		
2000	maintain t	ne minimum g	uaranteed flow re	equirements.	Headwater S	afety (cfs): ream Safety (cfs)	0.00
		3 4 5	6 7 8 9	10 11 1	12 Min. Gauge	Reading (cfs):	-

→ Median Monthly Flow → Threshold

Passby at Location (cfs):

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

	WMP-0	01448	API/ID Number: 047-05 SHL23HHS	1-01677 Operator: Noble En	ergy, Inc
Source I	D: 24325 Sou		eling Water Department eling Water Department	Source Latitude: -	
☐ Tro ✓ Re ✓ Pro	HUC-8 Code: Drainage Area dangered Species out Stream? gulated Stream? oximate PSD? uged Stream?	Mussel St Tier 3? Ohio River N	ream?	Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm): Max. Simultaneous Max. Truck pump rate	
	Reference Gaug Drainage Area (so	9999999	Ohio River Station: Willow Isla 20.00	nd Lock & Dam Gauge Threshold (cfs):	6468
Month 1 2 3 4 5 6 7 8 9 10 11 12	Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00 24,300.00 16,000.00 13,400.00 12,800.00 15,500.00 26,300.00 41,300.00	Threshold (+ pump	Estimated Available water (cfs)		
8000 6000 4000 2000	0 Flow on the fingineers maintain t	nis stream is re	gulated by the Army Corps to the stated thresholds waranteed flow requirements	Pump rate (cfs):	0.00

◆ Median Monthly Flow ■ Threshold

Passby at Location (cfs):

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

			Sour	ce Detail			
	WMP-C	01448	API/ID Number:	047-051-016 HL23HHS	577	Operator: Noble En	ergy, Inc
Source II	D: 24326 Sou		County PSD county PSD	7		Source Latitude: -	
HUC-8 Code: 5030106 Drainage Area (sq. mi.): 25000 County: Ohio □ Endangered Species? ✓ Mussel Stream? □ Trout Stream? □ Tier 3? ☑ Regulated Stream? Ohio River Min. Flow ☑ Proximate PSD? Wheeling Water Department ☑ Gauged Stream?					Anticip	vited withdrawal start date: ated withdrawal end date: Volume from Source (gal): Max. Pump rate (gpm): Max. Simultaneous Max. Truck pump rate	
	Reference Gaug Drainage Area (sc	9999999 q. mi.) 25,00	Ohio River Station	: Willow Island Lo	ock & Dam	Gauge Threshold (cfs):	6468
Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)				
1	45,700.00		-				
2	49,200.00		-				
3	65,700.00						
4	56,100.00	-					
5	38,700.00	(=)	-				
6	24,300.00	-	-				
7	16,000.00	-	-				
8	13,400.00						
9	12,800.00						
10	15,500.00	(=)					
11	26,300.00 41,300.00	-					
	V	/ater Availa	bility Profile			Water Availability Assessm Base Threshold (cfs):	ent of Location
8000	0					Upstream Demand (cfs):	
8000		•					
6000	0 Flow op th	nis stream is re	gulated by the A	rmy Corps of		Downstream Demand (cfs):	
4000	~ ~		e to the stated t			Pump rate (cfs):	
4000	0		uaranteed flow r			Headwater Safety (cfs):	0.00
2000	0 Hilalitaili t	ne minimum g	war arriced flow f	equilements.			
	B B				-	Ungauged Stream Safety (c	fs): 0.00
	1 2	3 4 5	6 7 8 9	0 10 11	12	Min. Gauge Reading (cfs):	_

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.


◆ Median Monthly Flow ■ Threshold

10


11

12

Min. Gauge Reading (cfs): Passby at Location (cfs):

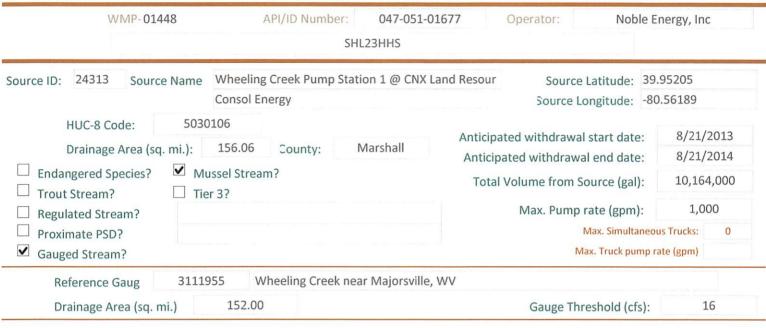

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)	
1	0.00	18.66		
2	0.00	18.66		
3	0.00	18.66	-	
4	0.00	18.66	2	
5	0.00	18.66		
6	0.00	18.66	-	
7	0.00	18.66		
8	0.00	18.66	-	
9	0.00	18.66		
10	0.00	18.66		
11	0.00	18.66		
12	0.00	18.66		

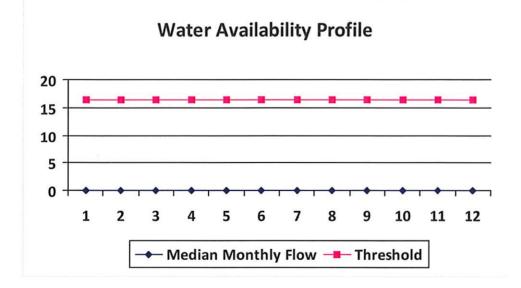


Water Availability Assessment of Location

Min. Gauge Reading (cfs): Passby at Location (cfs):	18.23 16.43
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.00
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	16.43

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.



Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	0.00	18.27	
2	0.00	18.27	-
3	0.00	18.27	
4	0.00	18.27	-
5	0.00	18.27	*
6	0.00	18.27	*
7	0.00	18.27	-
8	0.00	18.27	-
9	0.00	18.27	-
10	0.00	18.27	
11	0.00	18.27	
12	0.00	18.27	-

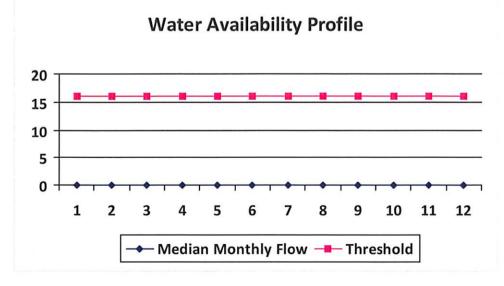

Min. Gauge Reading (cfs): Passby at Location (cfs):	18.23 16.04
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.00
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	16.04

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

west virginia department of environmental protection



Water Management Plan: Secondary Water Sources



WMP-01448

API/ID Number

047-051-01677

Operator:

Noble Energy, Inc

SHL23HHS

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Multi-site impoundment

SHL #1 Centralized Freshwater Impoundment Source ID: 24327 Source Name 8/21/2013 Source start date: Source end date: 8/21/2014 -80.579465 39.979696 Marshall Source Lat: Source Long: County Max. Daily Purchase (gal) Total Volume from Source (gal): 10,164,000 **DEP Comments:**

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-200

WMP-01448	API/ID Number	API/ID Number 047-051-01677	Operator:	Noble Energy, Inc	
	SH	HL23HHS			

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 24328 Source Name SHL #2 Centralized Waste Pit 8/21/2013 Source start date: 8/21/2014 Source end date: 39.966973 -80.561377 Source Lat: Source Long: County Marshall 10,164,000 Max. Daily Purchase (gal) Total Volume from Source (gal): **DEP Comments:** WV51-WPC-00001

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-201

Source ID: 24329 Source Name SHL #3 Centralized Waste Pit 8/21/2013 Source start date: 8/21/2014 Source end date: 39.974133 -80.55527 Source Lat: Source Long: County Marshall 10,164,000 Max. Daily Purchase (gal) Total Volume from Source (gal): DFP Comments: WV51-WPC-00002

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-202

WMP-01448 API/ID Number 047-051-01677 Operator: Noble Energy, Inc
SHL23HHS

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID: 24330 Source Name SHL #4 Centralized Waste Pit 8/21/2013 Source start date: 8/21/2014 Source end date: 39.963284 -80.562743 Marshall Source Lat: Source Long: County 10,164,000 Max. Daily Purchase (gal) Total Volume from Source (gal): WV51-WPC-00003 **DEP Comments:**

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-204

Purchased Water

Bridgeport Ohio Water Department Source ID: 24324 Source Name 8/21/2013 Source start date: Public Water Provider 8/21/2014 Source end date: 40.08348 -80.736488 Source Lat: Source Long: County Max. Daily Purchase (gal) 200,000 Total Volume from Source (gal): 10,164,000 **DEP Comments:** Please ensure that purchases from this source are approved by, and completed in accordance with, requirements set forth by the State of Ohio Department of Environmental Protection.

WMP-01448 API/ID Number 047-051-01677 Operator: Noble Energy, Inc
SHL23HHS

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Recycled Frac Water

Source ID:	24331 Source Name		Various	Source start date:	8/21/2013
				Source end date:	8/21/2014
		Source Lat:	Source Long:	County	
	Max. Daily Purchase (gal)			Total Volume from Source (gal):	10,164,000
	DEP Co	omments: So	ources include, but are not limite	ed to, the SHL17 and SHL23 well pads.	

